

4000D SERIES (Pitch 3.96 mm Dip Type Low Mounting Ears)

FEATURE

Insulator Material : PBT + 30% Glass Fiber UL94V-0
 Contact Material : Brass
 Plating : Selective Gold Plating Over Nickel On Contact Area
 100μ" Tin Plating On Tail Section
 50μ" Nickel Underplating

SPECIFICATION

Current Rating : 3 Ampere
 Contact Resistance : 20 milliohms maximum
 Insulation Resistance : 5000 megohms minimum
 Voltage Rating : 800 VAC 1 minute
 Operation Temperature Range : -40°C to +105°C

ORDERING INFORMATION

4000D - □□□ - □ - C - □ - W - □

Termination Type

D : Dip Type

No. of Contacts

Pitch & Row to Row (R)
 B : Pitch 3.96 Row to Row 3.96
 (Max. 86 Contact)
 C : Pitch 3.96 Row to Row 5.08
 (Max. 44 Contact)

Other Custom Options

Mounting Ears

W : With Mounting Ears
 N : No Mounting Ears


Plating Code


Tail Length (T)
 C : 4.80 mm

No. of Contacts	Dimensions (Dim.)				
	A	B	C	D	E
5/10	41.24	34.94	27.40	24.06	15.84
6/12	45.20	38.90	31.36	28.02	19.80
8/16	53.12	46.82	39.28	35.94	27.72
10/20	61.04	54.74	47.20	43.86	35.64
12/24	68.96	62.66	55.12	51.78	43.56
13/26	72.92	66.62	59.08	55.74	47.52
14/28	76.88	70.58	63.04	59.70	51.48
15/30	80.84	74.54	67.00	63.66	55.44
16/32	84.80	78.50	70.96	67.62	59.40
18/36	92.72	86.42	78.88	75.54	67.32
20/40	100.64	94.34	86.80	83.46	75.24
22/44	108.56	102.26	94.72	91.38	83.16
23/46	112.52	106.22	98.68	95.34	87.12
24/48	116.48	110.18	102.64	99.30	91.08
25/50	120.44	114.14	106.60	103.26	95.04
28/56	132.32	126.02	118.48	115.14	106.92
30/60	140.24	133.94	126.40	123.06	114.84
31/62	144.20	137.90	130.36	127.02	118.80
32/64	148.16	141.86	134.32	130.98	122.76
35/70	160.04	153.74	146.20	142.86	134.64
36/72	164.00	157.70	150.16	146.82	138.60
43/86	191.72	185.42	177.88	174.54	166.32

Row to Row (R)	
B	3.96
C	5.08

Plating Code	
1	10μ"
2	G/F
3	3μ"
4	5μ"
5	G/F Overall
6	30μ"
7	Tin Overall
8	15μ"
9	20μ"

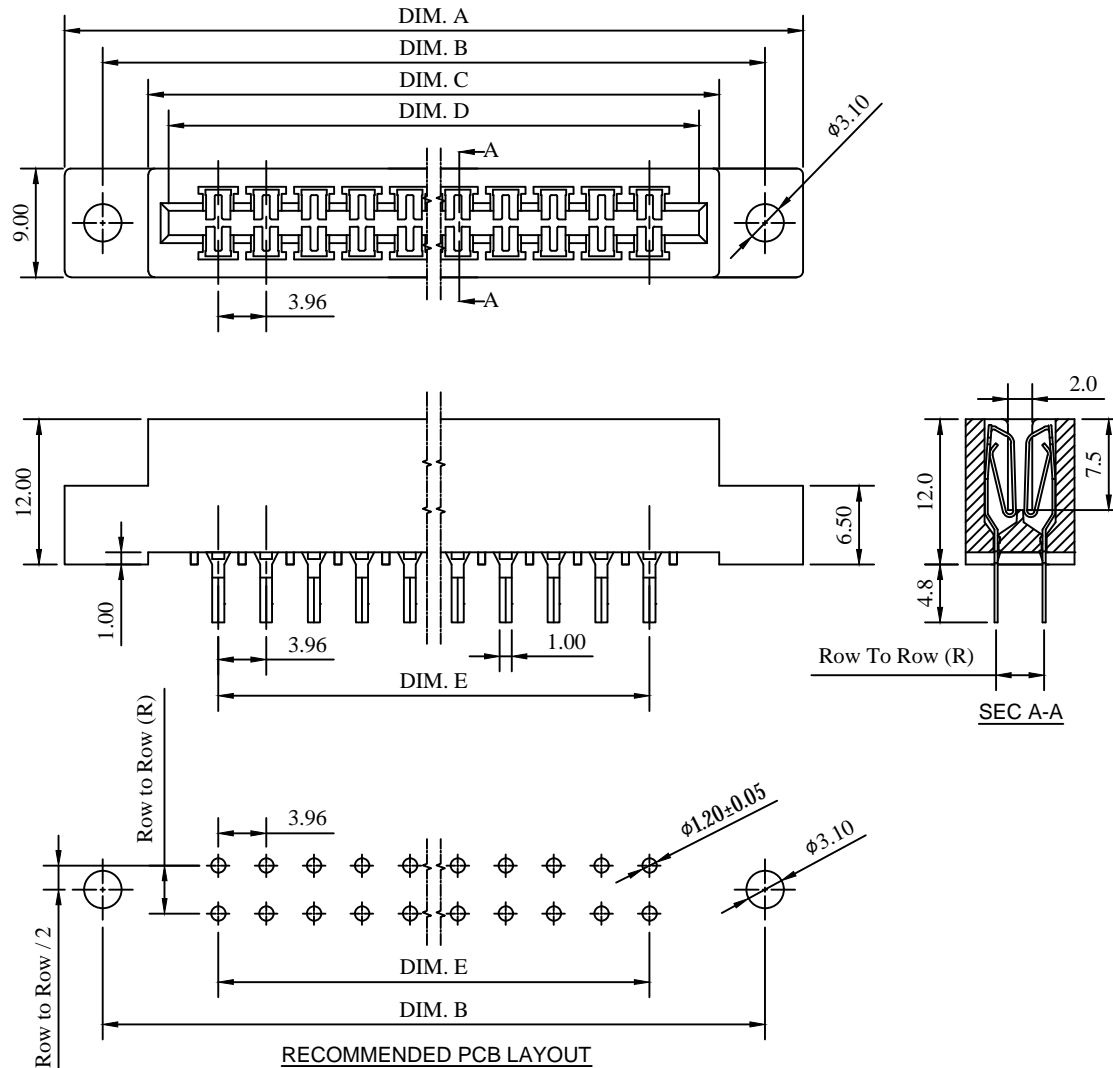

Title : Customer Drawing	Type : Edgecard Connector	 彩電企業股份有限公司 CHARTRON INCORPORATION								
Part No. : 4000D Series										
Description :										
Pitch 3.96 mm Edge Card Connector Dip Type										
Tail Length 4.80 mm										
With Low Mounting Ear										
Tolerances Unless Otherwise Specified :										
X. ± 0.50	.X ± 0.38	.XX ± 0.25								
X. ° ±	.X ° ±	.XX ° ±								
DWG No. : 010 - 0000 - 54D	Date : 01 - Feb. - 2018	<table border="1"> <tr> <th>Dim.</th> <th>Scale</th> <th>Sheet</th> <th>Rev.</th> </tr> <tr> <td>mm</td> <td>N/A</td> <td>1 of 1</td> <td>J</td> </tr> </table>	Dim.	Scale	Sheet	Rev.	mm	N/A	1 of 1	J
Dim.	Scale		Sheet	Rev.						
mm	N/A	1 of 1	J							
APPD. : James C.	CHK. : Connie Z.	DRW. : Bryant C.								