

7420 Series (Male HQ Type)

FEATURE :

Insulator Material : PBT UL94V-0 Color : Gray
 Contact Material : Brass
 Board-Lock (Optional) : Brass, 100μ" Tin Plating Min.
 Plating : Selective Gold Plating On Contact Area
 100μ" Tin Plating On Solder Area
 50μ" Nickel Min. Underplating

SPECIFICATION :

Current Rating : 20°C 2A, 70°C 1A, 100°C 0.5A
 Contact Resistance : 30 Milliohms Max. at DC 100mA
 Operation Temperature : -55°C to +125°C
 Dielectric Voltage : AC 1000V For 1 Minute
 Insulation Resistance : 1000 Megohms Min. At DC500V
 Operating Voltage : 250VAC

ORDERING INFORMATION :

7420 - □□ - T - □ - □ - □ - □

Board-Lock

N : No Board-Lock
 L : With Board-Lock

Tail Length

1 : 4.00 mm
 2 : 2.50 mm

Plating






2 : G/F Plating On Contact Area
 8 : 15μ" Gold Plating On Contact Area
 6 : 30μ" Gold Plating On Contact Area

Row / Positions With Contact Type

(See Chart A)




T : Straight Solder Type

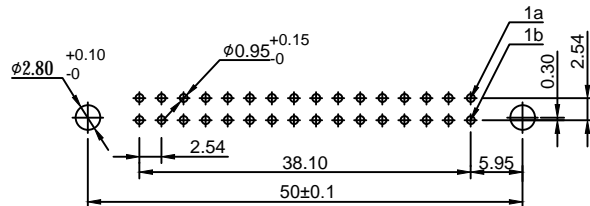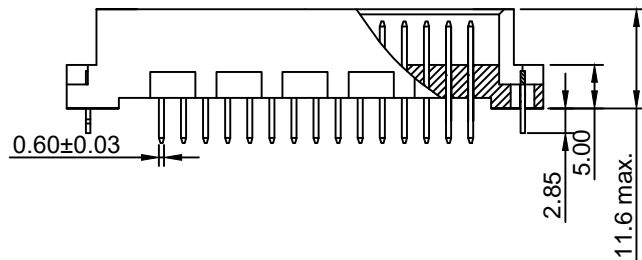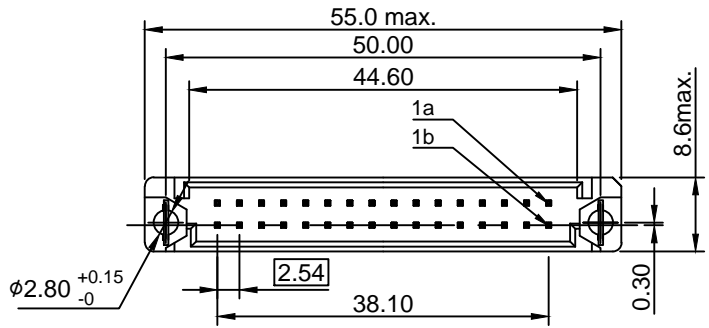

No. of Contacts



RECOMMENDED PCB LAYOUT

Chart A

Code	No. of Contact	Rows / Positions With Contact	Pitch
E	32	Row a + b 	2.54 mm
F	16	Row a 	2.54 mm
G	16	Row a + b All Even No. 	5.08 mm Half - Loaded

Title : Customer Drawing		Type : DIN 41612 Eurocard		 彩電企業股份有限公司 CHARTRON INCORPORATION			
Part No. : 7420 Series HQ Type							
Description : 7420 Series Male HQ Type							
DWG No. : 010 - 0004 - 742		Date : 01 - Feb. - 2018		 Dim. Scale Sheet Rev. mm N/A 1 of 1 D			
APPD. : James C.	CHK. : Connie Z.	DRW. : Bryant C.					