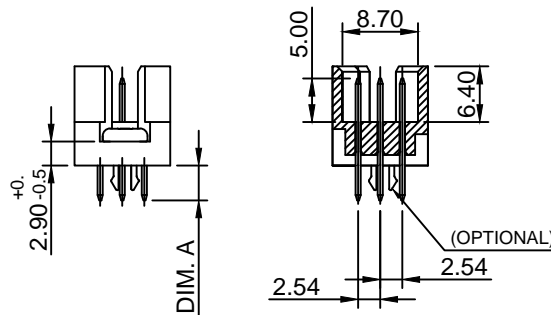


RECOMMENDED PCB LAYOUT



7430 Series (Male HR Type)

FEATURE :

Insulator Material : PBT UL94V-0 Color : Gray
 Contact Material : Brass
 Board-Lock (Optional) : Brass, 100μ" Tin Plating Min.
 Plating : Selective Gold Plating On Contact Area
 100μ" Tin Plating On Solder Area
 50μ" Nickel Min. Underplating

SPECIFICATION :

Current Rating : 20°C 2A, 70°C 1A, 100°C 0.5A
 Contact Resistance : 30 Milliohms Max. at DC 100mA
 Operation Temperature : -55°C to +125°C
 Dielectric Voltage : AC 1000V For 1 Minute
 Insulation Resistance : 1000 Megaohms Min. At DC500V
 Operating Voltage : 250VAC

ORDERING INFORMATION :

7430 - □□ - T - □ - □ - □ - □

Board-Lock

N : No Board-Lock
 L : With Board-Lock

Tail Length

1 : 4.00 mm
 2 : 2.50 mm

Plating







2 : G/F Plating On Contact Area
 8 : 15u" Gold Plating On Contact Area
 6 : 30u" Gold Plating On Contact Area

Row / Positions With Contact Type (See Chart A)

T : Straight Solder Type

No. of Contacts

Chart A

Code	No. of Contacts	Rows / Positions With Contact	Pitch	Code	No. of Contacts	Rows / Positions With Contact	Pitch
G	48	Row a + b + c 	2.54 mm	J	16	Row a 	2.54 mm
H	32	Row a + c 	2.54 mm	K	24	Row a + b + c All Even No. 	5.08 mm Half-Loaded
I	32	Row a + b 	2.54 mm	L	16	Row a + c All Even No. 	

Title : Customer Drawing Type : DIN 41612 Eurocard

Part No. : 7430 Series HR Type

Description :
 7430 Series Male HR Type

 彩電企業股份有限公司
 CHARTRON INCORPORATION

Tolerances Unless Otherwise Specified :

X. ± 0.50 .X ± 0.38 .XX ± 0.25
 X.° ± .X° ± .XX° ±

DWG No. : 010 - 0004 - 743 Date : 01 - Feb. - 2018

APPD. : James C. CHK. : Connie Z. DRW. : Bryant C.

Dim.	Scale	Sheet	Rev.
mm	N/A	1 of 1	D