

7530 Series (Female HR Type)

FEATURE :
 Insulator Material : PBT UL94V-0 Color : Gray
 Contact Material : Brass
 Board-Lock (Optional) : Brass, 100μ" Tin Plating Min.
 Plating : Selective Gold Plating On Contact Area
 100μ" Tin Plating On Solder Area
 50μ" Nickel Min. Underplating

SPECIFICATION :
 Current Rating : 20°C 2A, 70°C 1A, 100°C 0.5A
 Contact Resistance : 30 Milliohms Max. at DC 100mA
 Operation Temperature : -55°C to +125°C
 Dielectric Voltage : AC 1000V For 1 Minute
 Insulation Resistance : 1000 Megaohms Min. At DC500V
 Operating Voltage : 250VAC

ORDERING INFORMATION :

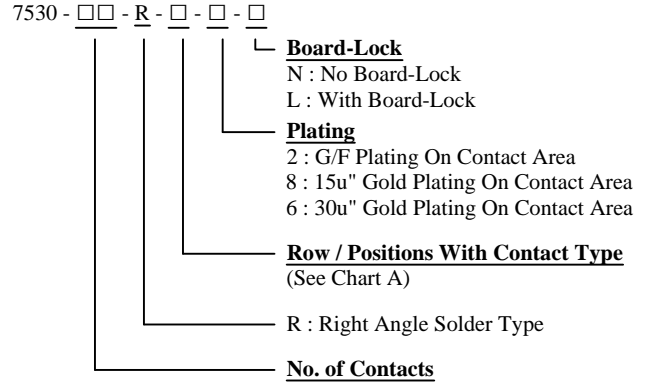


Chart A							
Code	No. of Contacts	Rows / Positions With Contact	Pitch	Code	No. of Contacts	Rows / Positions With Contact	Pitch
G	48	Row a + b + c 	2.54 mm	J	16	Row a 	2.54 mm
H	32	Row a + c 	2.54 mm	K	24	Row a + b + c All Even No. 	5.08 mm Half-Loaded
I	32	Row a + b 	2.54 mm	L	16	Row a + c All Even No. 	

Title : Customer Drawing		Type : DIN 41612 Eurocard		彩電企業股份有限公司 CHARTRON INCORPORATION			
Part No. : 7530 Series HR Type							
Description : 7530 Series Female HR Type				Tolerances Unless Otherwise Specified :			
X. ± 0.50		.X ± 0.38		.XX ± 0.25			
X. ° ±		.X ° ±		.XX ° ±			
DWG No. : 010 - 0004 - 753		Date : 01 - Feb. - 2018		Dim. Scale Sheet Rev. mm N/A 1 of 1 D			
APPD. : James C.	CHK. : Connie Z.	DRW. : Bryant C.					